


Technical datasheet

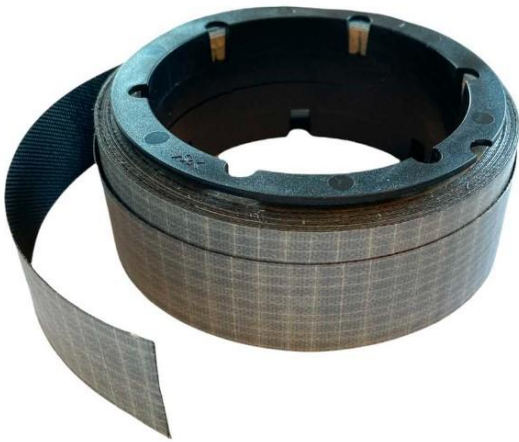

High thermal load capacity and excellent insulating properties. To wrap around the end of the sealing cord.

Advantages & Properties

Temperature resistance: Up to 550°C*

Made of filament yarns

Excellent tensile strength

High suppleness

Smokeproof

Easy to mount

Self-adhesive

Resistant to most acids and lyes,
resistant against solvents

*In assessing temperature resistance, the influence of the medium and the type of stress are of decisive importance.

Item number, article & packaging units

Art.-Nr.	Article	PU
11600	25 mm width, 0,14mm thick	5 meters/roll

Note

All information and recommendations contained in this technical data sheet do not represent guaranteed properties. They are based on our research results and experience. However, they are not binding, as we cannot be held responsible for compliance with the processing conditions. We cannot be responsible for compliance with the processing conditions, as we are not familiar with the specific application conditions at the user's site.

A guarantee can only be given for the consistently high quality of our products. We recommend that you carry out sufficient tests of your own to determine whether the product specified has the properties you require. Any claim arising from this is excluded. The processor bears sole responsibility for incorrect or improper use.

Safety and health

See Safety Data Sheet